




Fortis Montana-5 kW wind turbine system

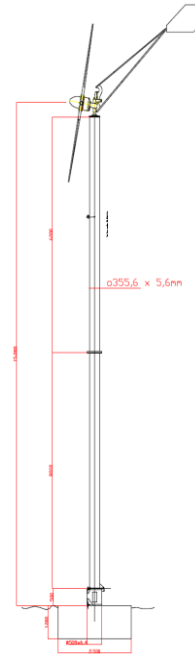

Part number	Type	Description
4000-1-18	Montana System for On-Grid Output: 1-phase-230VAC / 50Hz	Configuration with automatic brake switch, controller, ABB grid feed inverter with front Panel display, keyboard, LED panel and dump load. Inverter including Power Curve programming. Output: 230VAC 1-phase + N + PE

Fortis Montana unique features

- Conforms to IEC 61400-2 international standard
- Upwind, direct drive, fixed pitch, overvoltage protection and emergency braking
- Power curve according to frequency or voltage
- Maintenance free, 5 year warranty, installation by Fortis Certified System Partner
- Average lifetime for Montana is over 20 years
- Made in The Netherlands



Technical Specifications

Max. output	5800W
Output @ 11m/sec	3.4kW
Wind speed:	
cut in	2.5 m/sec.
rated	17m/sec.
survival	60 m/sec.
Rotor blades:	
number	3
diameter	5.0 m
area	19.63m ²
airfoil	E 387
tip speed ratio	7
material	glass-fibre reinforced epoxy
Generator:	
type	brushless permanent magnet 9-pole
RPM operation range	120 - 450
voltage	from 48 to 500VDC standard other voltages on request
frequency	0-70 Hz
Other:	
gearbox	none
braking mechanism	Automatic breaking switch
rotor speed control	Inclined hinged vane
output control	voltage control with dump load
rectifiers	built inside controller
hub type	rigid
yaw system	tail vane
rotor position	upwind
tower	guyed steel tubular (height: 12- 24m) free standing tube mast (height: 12 -24m)
Head weight	200 kg

Contact us now for more information

FORTIS Wind Energy

Botanicuslaan 14
9751 AC Haren
The Netherlands
Tel.: +31 (0) 50 5515 666
Email: info@fortiswindenergy.com



Scan the QR-code

Your local Fortis partner:

“Company”